

**“Good Neighbor” Modeling  
for the Kentucky 2008 8-Hour Ozone  
State Implementation Plan**

**Final Modeling Report**

Prepared by:  
Alpine Geophysics, LLC  
7341 Poppy Way  
Arvada, CO 80007

November 2017  
Project Number: TS-510

---

## Contents

	Page
<b>1.0 INTRODUCTION</b>	<b>4</b>
1.1 OVERVIEW	4
1.2 STUDY Background	5
1.2.1 Current Ozone Air Quality at the Maintenance Monitors	6
1.2.2 EPA Final CSAPR Update Assessment Tool Results	6
1.2.3 Purpose	8
1.3 Lead Agency and Principal Participants	8
1.4 Overview of Modeling Approach	8
1.4.1 Episode Selection	8
1.4.2 Model Selection	8
1.4.3 Base and Future Year Emissions Data	9
1.4.4 Input Preparation and QA/QC	9
1.4.5 Meteorology Input Preparation and QA/QC	9
1.4.6 Initial and Boundary Conditions Development	9
1.4.7 Air Quality Modeling Input Preparation and QA/QC	9
1.4.8 Model Performance Evaluation	9
1.4.9 Diagnostic Sensitivity Analyses	10
<b>2.0 MODEL SELECTION</b>	<b>11</b>
<b>3.0 EPISODE SELECTION</b>	<b>14</b>
<b>4.0 MODELING DOMAIN SELECTION</b>	<b>15</b>
4.1 HORIZONTAL Domain	15
4.2 VERTICAL Modeling Domain	16
4.3 DATA Availability	17
4.3.1 Emissions Data	17
4.3.2 Air Quality	17
4.3.4 Meteorological Data	17
4.3.5 Initial and Boundary Conditions Data	17
<b>5.0 MODEL INPUT PREPARATION PROCEDURES</b>	<b>19</b>
5.1 METEOROLOGICAL Inputs	19
5.1.1 WRF Model Science Configuration	19
5.1.2 WRF Input Data Preparation Procedures	19
5.1.3 WRF Model Performance Evaluation	19
5.1.3 WRF-CAMx/MCIP Reformatting Methodology	20
5.2 EMISSION Inputs	20
5.2.1 Available Emissions Inventory Datasets	20
5.2.2 Development of CAMx-Ready Emission Inventories	20
5.2.2.1 Episodic Biogenic Source Emissions	20
5.2.2.2 Point Source Emissions	20

---

5.2.2.3 Area and Non-Road Source Emissions	21
5.2.2.4 Wildfires, Prescribed Burns, Agricultural Burns	21
5.2.2.5 QA/QC and Emissions Merging	21
5.2.3 Use of the Plume-in-Grid (PiG) Subgrid-Scale Plume Treatment	21
5.2.4 Future-Year Emissions Modeling	21
5.3 PHOTOCHEMICAL Modeling Inputs	22
5.3.1 CAMx Science Configuration and Input Configuration	22
<b>6.0 MODEL PERFORMANCE EVALUATION</b>	<b>23</b>
6.1 EPA Model Performance Evaluation	23
6.1.1 Overview of EPA Model Performance Evaluation Recommendations	23
<b>7.0 FUTURE YEAR MODELING</b>	<b>25</b>
7.1 FUTURE Year to be Simulated	25
7.2 FUTURE Year Growth and Controls	25
7.3 FUTURE Year Baseline Air Quality Simulations	25
7.4 Conclusions from 2023 CAMx Modeling	25
<b>8.0 MODELING DOCUMENTATION AND DATA ARCHIVE</b>	<b>27</b>
<b>9.0 REFERENCES</b>	<b>28</b>

**TABLES**

Table 1-1. Final CSAPR Update-identified maintenance monitors where Kentucky is identified as a significant contributor.	6
Table 4-1. WRF and CAMx layers and their approximate height above ground level.	16
Table 4-2. Overview of routine ambient data monitoring networks.	18
Table 7-1. GNS Modeling results at Final CSAPR Update-identified maintenance monitors where Kentucky was identified as a significant contributor.	26

**FIGURES**

Figure 1-1. Trend in ozone concentrations at the CSAPR-identified maintenance monitors between 2008 and 2015.	7
Figure 1-2. Observed 2013-2015 ozone Design Value concentrations (ppb) at CSAPR-identified maintenance monitors where Kentucky is identified as a significant contributor.	7
Figure 4-1. Map of 12km CAMx modeling domains. Source: EPA NAAQS NODA.	15

## 1.0 INTRODUCTION

### 1.1 OVERVIEW

Sections 110(a)(1) and (2) of the Clean Air Act (CAA) require all states to adopt and submit to the U. S. Environmental Protection Agency (EPA) any revisions to their infrastructure State Implementation Plans (SIP) which provide for the implementation, maintenance and enforcement of a new or revised national ambient air quality standard (NAAQS). The EPA revised the ozone NAAQS in March 2008 and completed the designation process to identify nonattainment areas in July 2012. The Kentucky Division for Air Quality (KYDAQ) subsequently submitted Kentucky's infrastructure SIP certification on July 17, 2012 with EPA disapproving Prong 1 (interstate transport – significant contribution) in April 2013. Additionally, through final action and rulemaking of the Cross-State Air Pollution Rule (CSAPR) (81 FR 74504), EPA has indicated its intention to issue a Federal Implementation Plan (FIP) in the absence of an approved revision to the SIP.

CAA section 110(a)(2)(D)(i)(I) requires each state to prohibit emissions that will significantly contribute to nonattainment of a NAAQS, or interfere with maintenance of a NAAQS, in a downwind state. According to EPA, Kentucky's July 2012 infrastructure certification failed to demonstrate that emissions activities within Kentucky will not significantly contribute to nonattainment or interfere with maintenance of the 2008 ozone NAAQS in a neighboring state.

This document serves to provide the air quality modeling results for the Commonwealth of Kentucky 8-hour ozone modeling analysis in support of the revision of the Kentucky 2008 8-hour ozone Good Neighbor State Implementation Plan (GNS). The 2008 8-hour ozone NAAQS form is the three year average of the fourth highest daily maximum 8-hour ozone concentrations with a threshold not to be exceeded of 0.075 ppm (75 ppb). On October 26, 2015, the EPA promulgated a new 8-hour ozone NAAQS with a threshold not to be exceeded of 0.070 ppm (70 ppb). Attainment of this new (2015) ozone NAAQS will be addressed in future SIP actions and may use results of this effort to inform that determination.

This document describes the overall modeling activities performed in order to demonstrate that Kentucky does not significantly contribute to nonattainment or interfere with maintenance of the 2008 ozone NAAQS in a neighboring state. This effort was undertaken working closely with the KYDAQ, other local agencies, and stakeholder groups, including the Midwest Ozone Group which funded this modeling.

A comprehensive draft Modeling Protocol for an 8-hour ozone SIP revision study was prepared and provided to EPA for comment and review. Based on EPA comments, the draft document was revised to include many of the comments and recommendations submitted, most importantly, but not limited to, using EPA's 2023en modeling platform (EPA, 2017a). This 2023en modeling platform represents EPA's estimation of a projected "base case" that demonstrates compliance with final CSAPR update seasonal EGU NO<sub>x</sub> budgets. A final Modeling Protocol was prepared and submitted to the Midwest Ozone Group and KYDAQ.

## 1.2 STUDY BACKGROUND

Section 110(a)(2)(D)(i)(I) of the CAA requires that states address the interstate transport of pollutants and ensure that emissions within the state do not contribute significantly to nonattainment in, or interfere with maintenance by, any other state. The following section is intended to address Kentucky's interstate transport, or "Good Neighbor," responsibilities for the 2008 ozone NAAQS. Kentucky has many rules and limits currently in place that control ozone precursor pollutants and emissions of these pollutants are decreasing in the state. These facts strengthen the demonstration that no further controls or emission limits may be required to fulfil Kentucky's responsibilities under the Good Neighbor Provisions for the 2008 ozone NAAQS.

On October 26, 2016, EPA published in the Federal Register a final update to the Cross-State Air Pollution Rule (CSAPR) for the 2008 ozone NAAQS. In this final update, EPA outlines its four-tiered approach to addressing the interstate transport of pollution related to the ozone NAAQS, or states' Good Neighbor responsibilities. EPA's approach determines which states contribute significantly to nonattainment areas or significantly interfere with air quality in maintenance areas in downwind states. EPA has determined that if a state's contribution to downwind air quality problems is below one percent of the applicable NAAQS, then it does not consider that state to be significantly contributing to the downwind area's nonattainment or maintenance concerns. EPA's approach to addressing interstate transport has been shaped by public notice and comment and refined in response to court decisions.

As part of the final CSAPR update, EPA released regional air quality modeling to support the 2008 ozone NAAQS attainment date of 2017, indicating which states significantly contribute to nonattainment or maintenance area air quality problems in other states. To make these determinations, the EPA projected future ozone nonattainment and maintenance receptors, then conducted state-level ozone source apportionment modeling to determine which states contributed pollution over a pre-identified "contribution threshold."

Kentucky's contribution to projected downwind nonattainment area air quality was not found to be over the one-percent threshold at any of the final CSAPR-identified nonattainment monitors. However, it was projected to be over the one-percent threshold at four final CSAPR-identified maintenance monitors ("problem monitors") in the eastern US, and therefore identified as a significant contributor to the prevention of maintenance at these monitors. The one percent threshold for the 2008 NAAQS is 0.75 parts per billion (ppb). As shown in Table 1-1, Kentucky was shown to contribute a maximum of 10.88 ppb to a monitor in Hamilton, Ohio, 2.36 ppb to a monitor in Philadelphia, Pennsylvania, 2.18 ppb to a monitor at Harford, Maryland, and 1.03 ppb to a monitor in Richmond, New York.

**Table 1-1. Final CSAPR Update-identified maintenance monitors where Kentucky is identified as a significant contributor.**

Monitor	State	County	2009-2013 Base Period Average Design Value	2009-2013 Base Period Maximum Design Value	2017 Base Case Average Design Value	2017 Base Case Maximum Design Value	KY Contribution (ppb)
390610006	OH	Hamilton	82.0	85	74.6	77.4	10.88
421010024	PA	Philadelphia	83.3	87	73.6	76.9	2.36
240251001	MD	Harford	90.0	93	78.8	81.4	2.18
360850067	NY	Richmond	81.3	83	75.8	77.4	1.03

Because Kentucky's contribution to projected downwind maintenance problems is above the one percent threshold and thus significant, additional analyses are required to fulfil Kentucky's responsibilities under the Good Neighbor Provisions for the 2008 ozone NAAQS.

### 1.2.1 Current Ozone Air Quality at the Maintenance Monitors

Figure 1-1 displays the maximum 8-hour ozone Design Values from 2008-2015 along with the highest fourth highest daily maximum 8-hour ozone concentration at the four CSAPR-maintenance monitors (See Figure 1-2 that follows) to which Kentucky is associated as a significant contributor. The fourth highest daily maximum 8-hour ozone concentration at these monitors exhibits high year-to-year variability that is primarily due to meteorological variations that can cause the values to change between successive years. Use of the three-year average of these fourth highest values in the ozone Design Value results in a suppression of this variability so that the differences in the maximum 8-hour ozone Design Value over this period is less pronounced.

### 1.2.2 EPA Final CSAPR Update Assessment Tool Results

Based on EPA's Final CSAPR Update Rule analysis using the air quality assessment tool (AQAT), the two problem monitors in Pennsylvania and Ohio that Kentucky is attributed as a significant contributor are determined to become "clean" after implementation of the CSAPR Update controls. In addition to the pending air quality modeling being conducted for this study, this determination and these sites may or may not still be considered to be "receptors" that would require Kentucky to develop control strategies designed to remove air quality problems from these locations.

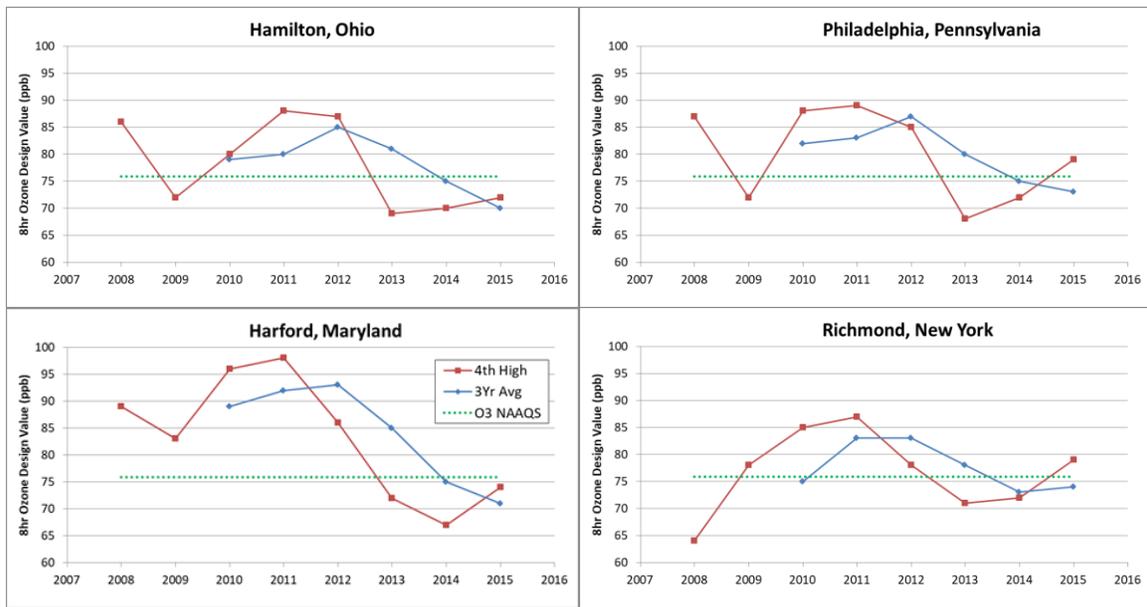


Figure 1-1. Trend in ozone concentrations at the CSAPR-identified maintenance monitors between 2008 and 2015.

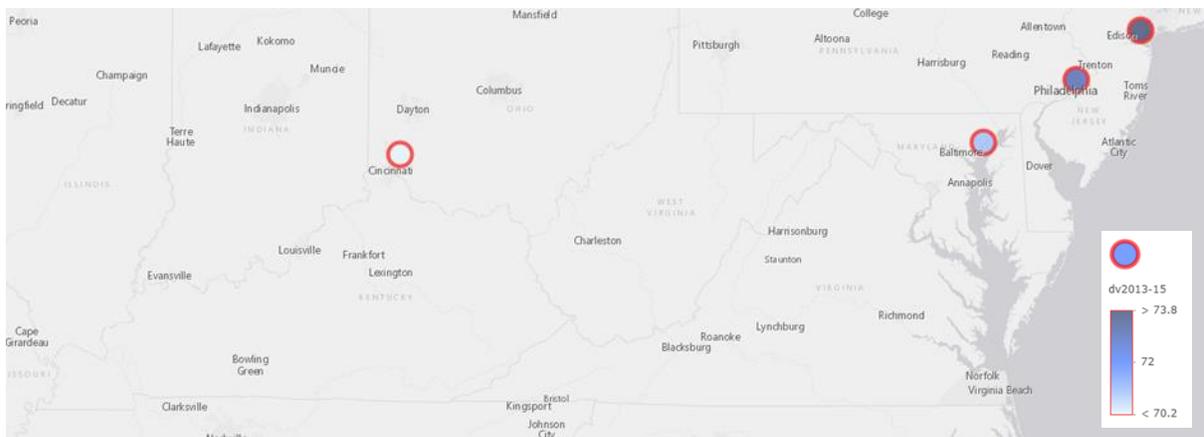


Figure 1-2. Observed 2013-2015 ozone Design Value concentrations (ppb) at CSAPR-identified maintenance monitors where Kentucky is identified as a significant contributor.

### 1.2.3 Purpose

This document serves to provide the air quality modeling results for the Commonwealth of Kentucky 8-hour ozone modeling analysis in support of the revision of the Kentucky 2008 8-hour ozone Good Neighbor State Implementation Plan (GNS). This document demonstrates that emissions activities within Kentucky will not significantly contribute to nonattainment or interfere with maintenance of the 2008 ozone NAAQS in a neighboring state with the four problem monitors identified in the final CSAPR update.

## 1.3 LEAD AGENCY AND PRINCIPAL PARTICIPANTS

The KYDAQ is the lead agency in the development of this 8-hour ozone SIP revision. EPA Region 4 in Atlanta is the local regional EPA office that will take the lead in the review and approval process for this SIP revision.

## 1.4 OVERVIEW OF MODELING APPROACH

The GNS 8-Hour ozone SIP modeling documented here includes an ozone simulation study using the 12 km grid based on EPA's 2023en modeling platform and preliminary source contribution assessment (EPA, 2016b).

### 1.4.1 Episode Selection

Episode selection is an important component of an 8-hour ozone attainment demonstration. EPA guidance recommends that 10 days be used to project 8-hour ozone Design Values at each critical monitor. The May 1 through August 31 2011 ozone season period was selected for the ozone SIP modeling primarily due to the following reasons:

- It is aligned with the 2011 NEI year, which is the latest currently available NEI.
- It is not an unusually low ozone year.
- Ambient meteorological and air quality data are available.
- A 2011 12 km CAMx modeling platform is available from the EPA that can be leveraged for the GNS ozone SIP modeling.

More details of the summer 2011 episode selection and justification using criteria in EPA's modeling guidance are contained in Section 3.

### 1.4.2 Model Selection

Details on the rationale for model selection are provided in Section 2. The Weather Research Forecast (WRF) prognostic meteorological model was selected for the GNS ozone modeling using a 12 km resolution grid. Additional emission modeling is not required as the 2023en platform was provided to Kentucky in pre-merged CAMx ready format. Emissions processing was completed by EPA using the SMOKE emissions model for most source categories. The exceptions are that BEIS model was used for biogenic emissions and there are special processors for fires, windblown dust, lightning and sea salt emissions. The MOVES2014 on-road mobile source emissions model was used with SMOKE-MOVES to generate on-road mobile source emissions with EPA generated vehicle activity data provided in the NAAQS NODA. The

CAMx photochemical grid model was also be used. The setup is based on the same WRF/SMOKE/BEIS/CAMx modeling system used in the EPA 2023en platform modeling.

#### **1.4.3 Base and Future Year Emissions Data**

The 2023 future year was selected for the attainment demonstration modeling based on OAQPS Director Steven Page's October 27, 2017 memo (Page, 2017, page 4) to Regional Air Directors. In this memo, Director Page identified the two primary reasons the EPA selected 2023 for their 2008 NAAQS modeling; (1) the D.C. Circuit Court's response to *North Carolina v. EPA* in considering downwind attainment dates for the 2008 NAAQS, and (2) EPA's consideration of the timeframes that may be required for implementing further emission reductions as expeditiously as possible. The 2011 base case and 2023 future year emissions will be based on EPA's "en" inventories with no adjustment. This platform has been identified by EPA as the base case for compliance with the final CSAPR update seasonal EGU NOx emission budgets.

#### **1.4.4 Input Preparation and QA/QC**

Quality assurance (QA) and quality control (QC) of the emissions datasets are some of the most critical steps in performing air quality modeling studies. Because emissions processing is tedious, time consuming and involves complex manipulation of many different types of large databases, rigorous QA measures are a necessity to prevent errors in emissions processing from occurring. The GNS 8-Hour ozone modeling study utilized EPA's pre-QA/QC'd emissions platform that followed a multistep emissions QA/QC approach.

#### **1.4.5 Meteorology Input Preparation and QA/QC**

The CAMx 2011 12 km meteorological inputs are based on WRF meteorological modeling conducted by EPA. Details on the EPA 2011 WRF application and evaluation are provided by EPA (EPA 2014d).

#### **1.4.6 Initial and Boundary Conditions Development**

Initial concentrations (IC) and Boundary Conditions (BCs) are important inputs to the CAMx model. We ran 15 days of model spin-up before the first high ozone days occur in the modeling domain so the ICs are washed out of the modeling domain before the first high ozone day of the May-August 2011 modeling period. The lateral boundary and initial species concentrations are provided by a three dimensional global atmospheric chemistry model, GEOS-Chem (Yantosca, 2004) standard version 8-03-02 with 8-02-01 chemistry.

#### **1.4.7 Air Quality Modeling Input Preparation and QA/QC**

Each step of the air quality modeling was subjected to QA/QC procedures. These procedures included verification of model configurations, confirmation that the correct data were used and processed correctly, and other procedures.

#### **1.4.8 Model Performance Evaluation**

The Model Performance Evaluation (MPE) relied on the CAMx MPE from EPA's associated modeling platforms. EPA's MPE recommendations in their ozone modeling guidance (EPA, 2007; 2014e) were followed in this evaluation. Many of EPA's MPE procedures have already

been performed by EPA in their CAMx 2011 modeling database being used in the GNS ozone SIP modeling.

#### **1.4.9 Diagnostic Sensitivity Analyses**

Since no issues were identified in confirming Alpine's CAMx runs compared to EPA's using the same modeling platform and configuration, additional diagnostic sensitivity analyses were not required.

## 2.0 MODEL SELECTION

This section documents the models used in the 8-hour ozone GNS SIP modeling study. The selection methodology presented in this chapter mirrors EPA's regulatory modeling in support of the 2008 Ozone NAAQS Preliminary Interstate Transport Assessment (Page, 2017; EPA, 2016b).

Unlike some previous ozone modeling guidance that specified a particular ozone model (e.g., EPA, 1991 that specified the Urban Airshed Model; Morris and Myers, 1990), the EPA now recommends that models be selected for ozone SIP studies on a "case-by-case" basis. The latest EPA ozone guidance (EPA, 2014) explicitly mentions the CMAQ and CAMx PGMs as the most commonly used PGMs that would satisfy EPA's selection criteria but notes that this is not an exhaustive list and does not imply that they are "preferred" over other PGMs that could also be considered and used with appropriate justification. EPA's current modeling guidelines lists the following criteria for model selection (EPA, 2014e):

- It should not be proprietary;
- It should have received a scientific peer review;
- It should be appropriate for the specific application on a theoretical basis;
- It should be used with data bases which are available and adequate to support its application;
- It should be shown to have performed well in past modeling applications;
- It should be applied consistently with an established protocol on methods and procedures;
- It should have a user's guide and technical description;
- The availability of advanced features (e.g., probing tools or science algorithms) is desirable; and
- When other criteria are satisfied, resource considerations may be important and are a legitimate concern.

For the GNS 8-hour ozone modeling, we used the WRF/SMOKE/MOVES2014/BEIS/CAMx-OSAT/APCA modeling system as the primary tool for demonstrating attainment of the ozone NAAQS at downwind monitors at downwind problem monitors. The utilized modeling system satisfies all of EPA's selection criteria. A description of the key models to be used in the GNS ozone SIP modeling follows.

**WRF/ARW:** The Weather Research and Forecasting (WRF)<sup>1</sup> Model is a mesoscale numerical weather prediction system designed to serve both operational forecasting and atmospheric research needs (Skamarock, 2004; 2006; Skamarock et al., 2005). The Advanced Research WRF (ARW) version of WRF was used in this ozone modeling study. It features multiple dynamical cores, a 3-dimensional variational (3DVAR) data assimilation system, and a software architecture allowing for computational parallelism and system extensibility. WRF is suitable for a broad spectrum of applications across scales ranging from meters to thousands of

---

<sup>1</sup> <http://www.wrf-model.org/index.php>

kilometers. The effort to develop WRF has been a collaborative partnership, principally among the National Center for Atmospheric Research (NCAR), the National Oceanic and Atmospheric Administration (NOAA), the National Centers for Environmental Prediction (NCEP) and the Forecast Systems Laboratory (FSL), the Air Force Weather Agency (AFWA), the Naval Research Laboratory, the University of Oklahoma, and the Federal Aviation Administration (FAA). WRF allows researchers the ability to conduct simulations reflecting either real data or idealized configurations. WRF provides operational forecasting a model that is flexible and efficient computationally, while offering the advances in physics, numerics, and data assimilation contributed by the research community.

**SMOKE:** The Sparse Matrix Operator Kernel Emissions (SMOKE)<sup>2</sup> modeling system is an emissions modeling system that generates hourly gridded speciated emission inputs of mobile, non-road, area, point, fire and biogenic emission sources for photochemical grid models (Coats, 1995; Houyoux and Vukovich, 1999). As with most ‘emissions models’, SMOKE is principally an emission processing system and not a true emissions modeling system in which emissions estimates are simulated from ‘first principles’. This means that, with the exception of mobile and biogenic sources, its purpose is to provide an efficient, modern tool for converting an existing base emissions inventory data into the hourly gridded speciated formatted emission files required by a photochemical grid model. SMOKE was used by EPA to prepare 2023en emission inputs for non-road mobile, area and point sources. These files were adopted and used as-is for this analysis.

**SMOKE-MOVES:** SMOKE-MOVES uses an Emissions Factor (EF) Look-Up Table from MOVES, gridded vehicle miles travelled (VMT) and other activity data and hourly gridded meteorological data (typically from WRF) and generates hourly gridded speciated on-road mobile source emissions inputs.

**MOVES2014:** MOVES2014<sup>3</sup> is EPA’s latest on-road mobile source emissions model that was first released in July 2014 (EPA, 2014a,b,c). MOVES2014 includes the latest on-road mobile source emissions factor information. Emission factors developed by EPA were used in this analysis.

**BEIS:** Biogenic emissions were modeled by EPA using version 3.61 of the Biogenic Emission Inventory System (BEIS). First developed in 1988, BEIS estimates volatile organic compound (VOC) emissions from vegetation and nitric oxide (NO) emissions from soils. Because of resource limitations, recent BEIS development has been restricted to versions that are built within the Sparse Matrix Operational Kernel Emissions (SMOKE) system.

**CAMx:** The Comprehensive Air quality Model with Extensions (CAMx<sup>4</sup>) is a state-of-science “One-Atmosphere” photochemical grid model capable of addressing ozone, particulate matter (PM), visibility and acid deposition at regional scale for periods up to one year (ENVIRON, 2015<sup>5</sup>). CAMx is a publicly available open-source computer modeling system for the integrated assessment of gaseous and particulate air pollution. Built on today’s understanding that air

---

2 <http://www.smoke-model.org/index.cfm>

3 <http://www.epa.gov/otaq/models/moves/>

4 <http://www.camx.com>

5 [http://www.camx.com/files/camxusersguide\\_v6-20.pdf](http://www.camx.com/files/camxusersguide_v6-20.pdf)

quality issues are complex, interrelated, and reach beyond the urban scale, CAMx is designed to (a) simulate air quality over many geographic scales, (b) treat a wide variety of inert and chemically active pollutants including ozone, inorganic and organic PM<sub>2.5</sub> and PM<sub>10</sub> and mercury and toxics, (c) provide source-receptor, sensitivity, and process analyses and (d) be computationally efficient and easy to use. The U.S. EPA has approved the use of CAMx for numerous ozone and PM State Implementation Plans throughout the U.S., and has used this model to evaluate regional mitigation strategies including those for most recent regional rules (e.g., Transport Rule, CAIR, NO<sub>x</sub> SIP Call, etc.). The current version of CAMx is Version 6.40 that was used in this study.

OSAT/APCA: Ozone Source Apportionment Technique/Anthropogenic Precursor Culpability Assessment (OSAT/APCA) tool of CAMx was selected to develop source contribution and significant contribution calculations and was not required for this analysis.

### 3.0 EPISODE SELECTION

EPA's most recent 8-hour ozone modeling guidance (EPA, 2014e) contains recommended procedures for selecting modeling episodes. The GNS ozone SIP revision modeling used the May through end of August 2011 modeling period because it satisfies the most criteria in EPA's modeling guidance episode selection discussion.

EPA guidance recommends that 10 days be used to project 8-hour ozone Design Values at each critical monitor. The May through August 2011 period has been selected for the ozone SIP modeling primarily due to being aligned with the 2011 NEI year, not being an unusually low ozone year, and availability of a 2011 12 km CAMx modeling platform from the EPA NAAQS NODA.

## 4.0 MODELING DOMAIN SELECTION

This section summarizes the modeling domain definitions for the GNS 8-hour ozone modeling, including the domain coverage, resolution, and map projection. It also discusses emissions, aerometric, and other data available for use in model input preparation and performance testing.

### 4.1 HORIZONTAL DOMAIN

The GNS ozone SIP modeling used a 12 km continental U.S. (12US2) domain. The 12 km nested grid modeling domain configuration is shown in Figure 4-1. The 12 km domain shown in Figure 4-1 represents the CAMx 12km air quality and SMOKE/BEIS emissions modeling domain. The WRF meteorological modeling was run on larger 12 km modeling domains than used for CAMx as demonstrated in EPA's meteorological model performance evaluation document (EPA, 2014d). The WRF meteorological modeling domains are defined larger than the air quality modeling domains because meteorological models can sometimes produce artifacts in the meteorological variables near the boundaries as the prescribed boundary conditions come into dynamic balance with the coupled equations and numerical methods in the meteorological model.



Figure 4-1. Map of 12km CAMx modeling domains. Source: EPA NAAQS NODA.

## 4.2 VERTICAL MODELING DOMAIN

The CAMx vertical structure is primarily defined by the vertical layers used in the WRF meteorological modeling. The WRF model employs a terrain following coordinate system defined by pressure, using multiple layer interfaces that extend from the surface to 50 mb (approximately 19 km above sea level). EPA ran WRF using 35 vertical layers. A layer averaging scheme is adopted for CAMx simulations whereby multiple WRF layers are combined into one CAMx layer to reduce the air quality model computational time. Table 4-1 displays the approach for collapsing the WRF 35 vertical layers to 25 vertical layers in CAMx.

**Table 4-1. WRF and CAMx layers and their approximate height above ground level.**

CAMx Layer	WRF Layers	Sigma P	Pressure (mb)	Approx. Height (m AGL)
25	35	0.00	50.00	17,556
	34	0.05	97.50	14,780
24	33	0.10	145.00	12,822
	32	0.15	192.50	11,282
23	31	0.20	240.00	10,002
	30	0.25	287.50	8,901
22	29	0.30	335.00	7,932
	28	0.35	382.50	7,064
21	27	0.40	430.00	6,275
	26	0.45	477.50	5,553
20	25	0.50	525.00	4,885
	24	0.55	572.50	4,264
19	23	0.60	620.00	3,683
18	22	0.65	667.50	3,136
17	21	0.70	715.00	2,619
16	20	0.74	753.00	2,226
15	19	0.77	781.50	1,941
14	18	0.80	810.00	1,665
13	17	0.82	829.00	1,485
12	16	0.84	848.00	1,308
11	15	0.86	867.00	1,134
10	14	0.88	886.00	964
9	13	0.90	905.00	797
	12	0.91	914.50	714
8	11	0.92	924.00	632
	10	0.93	933.50	551
7	9	0.94	943.00	470
	8	0.95	952.50	390
6	7	0.96	962.00	311
5	6	0.97	971.50	232
4	5	0.98	981.00	154
	4	0.99	985.75	115
3	3	0.99	990.50	77
2	2	1.00	995.25	38
1	1	1.00	997.63	19

### 4.3 DATA AVAILABILITY

The CAMx modeling systems requires emissions, meteorology, surface characteristics, initial and boundary conditions (IC/BC), and ozone column data for defining the inputs.

#### 4.3.1 Emissions Data

Without exception, the 2011 base year and 2023 base case emissions inventories for ozone modeling for this analysis were based on emissions obtained from the EPA's "en" modeling platform. This platform was obtained from EPA, via LADCO, in late September of 2017 and represents EPA's best estimate of all promulgated national, regional, and local control strategies, including final implementation of the seasonal EGU NOx emission budgets outlined in CSAPR.

#### 4.3.2 Air Quality

Data from ambient monitoring networks for gas species are used in the model performance evaluation. Table 4-2 summarizes routine ambient gaseous and PM monitoring networks available in the U.S.

#### 4.3.4 Meteorological Data

Meteorological data were generated by EPA using the WRF prognostic meteorological model (EPA, 2014d). WRF was run on a continental U.S. 12 km grid for the NAAQS NODA platform.

#### 4.3.5 Initial and Boundary Conditions Data

The lateral boundary and initial species concentrations are provided by a three dimensional global atmospheric chemistry model, GEOS-Chem (Yantosca, 2004) standard version 8-03-02 with 8-02-01 chemistry. The global GEOS-Chem model simulates atmospheric chemical and physical processes driven by assimilated meteorological observations from the NASA's Goddard Earth Observing System (GEOS-5; additional information available at: <http://gmao.gsfc.nasa.gov/GEOS/> and <http://wiki.seas.harvard.edu/geos-chem/index.php/GEOS-5>). This model was run for 2011 with a grid resolution of 2.0 degrees x 2.5 degrees (latitude-longitude). The predictions were used to provide one-way dynamic boundary concentrations at one-hour intervals and an initial concentration field for the CAMx simulations. The 2011 boundary concentrations from GEOS-Chem will be used for the 2011 and 2023 model simulations.

**Table 4-2. Overview of routine ambient data monitoring networks.**

Monitoring Network	Chemical Species Measured	Sampling Period	Data Availability/Source
The Interagency Monitoring of Protected Visual Environments (IMPROVE)	Speciated PM <sub>25</sub> and PM <sub>10</sub> (see species mappings)	1 in 3 days; 24 hr average	<a href="http://vista.cira.colostate.edu/improve/Data/IMPROVE/improve_data.htm">http://vista.cira.colostate.edu/improve/Data/IMPROVE/improve_data.htm</a>
Clean Air Status and Trends Network (CASTNET)	Speciated PM <sub>25</sub> , Ozone (see species mappings)	Approximately 1-week average	<a href="http://www.epa.gov/castnet/data.html">http://www.epa.gov/castnet/data.html</a>
National Atmospheric Deposition Program (NADP)	Wet deposition (hydrogen (acidity as pH), sulfate, nitrate, ammonium, chloride, and base cations (such as calcium, magnesium, potassium and sodium)), Mercury	1-week average	<a href="http://nadp.sws.uiuc.edu/">http://nadp.sws.uiuc.edu/</a>
Air Quality System (AQS) or Aerometric Information Retrieval System (AIRS)	CO, NO <sub>2</sub> , O <sub>3</sub> , SO <sub>2</sub> , PM <sub>25</sub> , PM <sub>10</sub> , Pb	Typically hourly average	<a href="http://www.epa.gov/air/data/">http://www.epa.gov/air/data/</a>
Chemical Speciation Network (CSN)	Speciated PM	24-hour average	<a href="http://www.epa.gov/ttn/amtic/amticpm.html">http://www.epa.gov/ttn/amtic/amticpm.html</a>
Photochemical Assessment Monitoring Stations (PAMS)	Varies for each of 4 station types.		<a href="http://www.epa.gov/ttn/amtic/pamsmain.html">http://www.epa.gov/ttn/amtic/pamsmain.html</a>
National Park Service Gaseous Pollutant Monitoring Network	Acid deposition (Dry; SO <sub>4</sub> , NO <sub>3</sub> , HNO <sub>3</sub> , NH <sub>4</sub> , SO <sub>2</sub> ), O <sub>3</sub> , meteorological data	Hourly	<a href="http://www2.nature.nps.gov/ard/gas/netdata1.htm">http://www2.nature.nps.gov/ard/gas/netdata1.htm</a>

## 5.0 MODEL INPUT PREPARATION PROCEDURES

This section summarizes the procedures used in developing the meteorological, emissions, and air quality inputs to the CAMx model for the GNS 8-hour ozone modeling on the 12 km grid for the May through August 2011 period. The 12 km CAMx modeling databases are based on the EPA “en” platform (EPA, 2017a; Page, 2017) databases. While some of the data prepared for this platform are new, many of the files are largely based on the NAAQS NODA platform. More details on the NAAQS NODA 2011 CAMx database development are provided in EPA documentation as follows:

- Technical Support Document (TSD) Preparation of Emissions Inventories for the Version 6.3, 2011 Emissions Modeling Platform (EPA, 2016a).
- Meteorological Model Performance for Annual 2011 WRF v3.4 Simulation (EPA, 2014d).
- Air Quality Modeling Technical Support Document for the 2015 Ozone NAAQS Preliminary Interstate Transport Assessment (EPA, 2016b).

The modeling procedures used in the modeling are consistent with over 20 years of EPA ozone modeling guidance documents (e.g., EPA, 1991; 1999; 2005a; 2007; 2014), other recent 8-hour ozone modeling studies conducted for various State and local agencies using these or other state-of-science modeling tools (see, for example, Morris et al., 2004a,b, 2005a,b; 2007; 2008a,b,c; Tesche et al., 2005a,b; Stoeckenius et al., 2009; ENVIRON, Alpine and UNC, 2013; Adelman, Shanker, Yang and Morris, 2014; 2015), as well as the methods used by EPA in support of the recent Transport analysis (EPA, 2010; 2015b, 2016b).

### 5.1 METEOROLOGICAL INPUTS

#### 5.1.1 WRF Model Science Configuration

Version 3.4 of the WRF model, Advanced Research WRF (ARW) core (Skamarock, 2008) was used for generating the 2011 simulations. Selected physics options include Pleim-Xiu land surface model, Asymmetric Convective Model version 2 planetary boundary layer scheme, KainFritsch cumulus parameterization utilizing the moisture-advection trigger (Ma and Tan, 2009), Morrison double moment microphysics, and RRTMG longwave and shortwave radiation schemes (Gilliam and Pleim, 2010). The WRF model configuration was prepared by EPA (EPA, 2014d).

#### 5.1.2 WRF Input Data Preparation Procedures

A summary of the WRF input data preparation procedures that were used are listed in EPA’s documentation (EPA, 2014d).

#### 5.1.3 WRF Model Performance Evaluation

The WRF model evaluation approach was based on a combination of qualitative and quantitative analyses. The quantitative analysis was divided into monthly summaries of 2-m temperature, 2-m mixing ratio, and 10-m wind speed using the boreal seasons to help generalize the model bias and error relative to a set of standard model performance benchmarks. The qualitative approach was to compare spatial plots of model estimated

monthly total precipitation with the monthly PRISM precipitation. The WRF model performance evaluation for the 12km domain is provided in EPA's documentation (EPA, 2014d).

### 5.1.3 WRFCAMx/MCIP Reformatting Methodology

The WRF meteorological model output data was processed to provide inputs for the CAMx photochemical grid model. The WRFCAMx processor maps WRF meteorological fields to the format required by CAMx. It also calculates turbulent vertical exchange coefficients (Kz) that define the rate and depth of vertical mixing in CAMx. A summary of the methodology used by EPA to reform the meteorological data into CAMx format is provided in EPA's documentation (EPA, 2014d).

## 5.2 EMISSION INPUTS

### 5.2.1 Available Emissions Inventory Datasets

The base year and future year base case emission inventories used for the GNS 8-hour ozone modeling study were based on EPA's "en" modeling platform (EPA, 2017a) without exception.

### 5.2.2 Development of CAMx-Ready Emission Inventories

CAMx-ready emission inputs were generated by EPA mainly by the SMOKE and BEIS emissions models. CAMx requires two emission input files for each day: (1) low level gridded emissions that are emitted directly into the first layer of the model from sources at the surface with little or no plume rise; and (2) elevated point sources (stacks) with plume rise calculated from stack parameters and meteorological conditions. For this analysis, CAMx will be operated using version 6 revision 4 of the Carbon Bond chemical mechanism (CB6r4).

EPA's 2011 base year and 2023 future year inventories from the "en" platform were used for all categories.

#### 5.2.2.1 Episodic Biogenic Source Emissions

Biogenic emissions were generated by EPA using the BEIS biogenic emissions model within SMOKE. BEIS uses high resolution GIS data on plant types and biomass loadings and the WRF surface temperature fields, and solar radiation (modeled or satellite-derived) to develop hourly emissions for biogenic species on the 12 km grids. BEIS generates gridded, speciated, temporally allocated emission files

#### 5.2.2.2 Point Source Emissions

2011 point source emissions were from the 2011 "en" modeling platform. Point sources were developed in two categories: (1) major point sources with Continuous Emissions Monitoring (CEM) devices; and (2) point sources without CEMs. For point sources with continuous emissions monitoring (CEM) data, day-specific hourly NOX and SO2 emissions were used for the 2011 base case emissions scenario. The VOC, CO and PM emissions for point sources with CEM data were based on the annual emissions temporally allocated to each hour of the year using the CEM hourly heat input. The locations of the point sources were converted to the LCP coordinate system used in the modeling. They were processed by EPA using SMOKE to generate the temporally varying (i.e., day-of-week and hour-of-day) speciated emissions needed by CAMx, using profiles by source category from the EPA "en" modeling platform.

#### 5.2.2.3 Area and Non-Road Source Emissions

2011 area and non-road emissions were from the 2011 “en” modeling platform. The area and non-road sources were spatially allocated to the grid using an appropriate surrogate distribution (e.g., population for home heating, etc.). The area sources were temporally allocated by month and by hour of day using the EPA source-specific temporal allocation factors. The SMOKE source-specific CB6 speciation allocation profiles were also used.

#### 5.2.2.4 Wildfires, Prescribed Burns, Agricultural Burns

Fire emissions in 2011NElv2 were developed based on Version 2 of the Satellite Mapping Automated Reanalysis Tool for Fire Incident Reconciliation (SMARTFIRE) system (Sullivan, et al., 2008). SMARTFIRE2 was the first version of SMARTFIRE to assign all fires as either prescribed burning or wildfire categories. In past inventories, a significant number of fires were published as unclassified, which impacted the emissions values and diurnal emissions pattern. Recent updates to SMARTFIRE include improved emission factors for prescribed burning.

#### 5.2.2.5 QA/QC and Emissions Merging

EPA processed the emissions by major source category in several different “streams”, including area sources, on-road mobile sources, non-road mobile sources, biogenic sources, non-CEM point sources, CEM point sources using day-specific hourly emissions, and emissions from fires. Separate Quality Assurance (QA) and Quality Control (QC) were performed for each stream of emissions processing and in each step following the procedures utilized by EPA. SMOKE includes advanced quality assurance features that include error logs when emissions are dropped or added. In addition, we generated visual displays that included spatial plots of the hourly emissions for each major species (e.g., NO<sub>x</sub>, VOC, some speciated VOC, SO<sub>2</sub>, NH<sub>3</sub>, PM and CO).

Scripts to perform the emissions merging of the appropriate biogenic, on-road, non-road, area, low-level, fire, and point emission files were written to generate the CAMx-ready two-dimensional day and domain-specific hourly speciated gridded emission inputs. The point source and, as available elevated fire, emissions were processed into the day-specific hourly speciated emissions in the CAMx-ready point source format.

The resultant CAMx model-ready emissions were subjected to a final QA using spatial maps to assure that: (1) the emissions were merged properly; (2) CAMx inputs contain the same total emissions; and (3) to provide additional QA/QC information.

### **5.2.3 Use of the Plume-in-Grid (PiG) Subgrid-Scale Plume Treatment**

Consistent with the EPA 2011 modeling platform, no PiG subgrid-scale plume treatment will be used.

### **5.2.4 Future-Year Emissions Modeling**

Future-year emission inputs were generated by processing the 2023 emissions data provided with EPA’s “en” modeling platform without exception.

## **5.3 PHOTOCHEMICAL MODELING INPUTS**

### **5.3.1 CAMx Science Configuration and Input Configuration**

This section describes the model configuration and science options used in the GNS 8-hour ozone modeling effort.

The latest version of CAMx (Version 6.40) was used in the GNS ozone modeling. The CAMx model setup used is defined by EPA in its air quality modeling technical support document (EPA, 2016b, 2017).

## 6.0 MODEL PERFORMANCE EVALUATION

The CAMx 2011 base case model estimates are compared against the observed ambient ozone and other concentrations to establish that the model is capable of reproducing the current year observed concentrations so it is likely a reliable tool for estimating future year ozone levels.

### 6.1 EPA MODEL PERFORMANCE EVALUATION

#### 6.1.1 Overview of EPA Model Performance Evaluation Recommendations

EPA current (EPA, 2007) and draft (EPA, 2014e) ozone modeling guidance recommendations for model performance evaluation (MPE) describes a MPE framework that has four components:

- Operation evaluation that includes statistical and graphical analysis aimed at determining how well the model simulates observed concentrations (i.e., does the model get the right answer).
- Diagnostic evaluation that focuses on process-oriented evaluation and whether the model simulates the important processes for the air quality problem being studied (i.e., does the model get the right answer for the right reason).
- Dynamic evaluation that assess the ability of the model air quality predictions to correctly respond to changes in emissions and meteorology.
- Probabilistic evaluation that assess the level of confidence in the model predictions through techniques such as ensemble model simulations.

EPA's guidance recommends that *"At a minimum, a model used in an attainment demonstration should include a complete operational MPE using all available ambient monitoring data for the base case model simulations period"* (EPA, 2014, pg. 63). And goes on to say *"Where practical, the MPE should also include some level of diagnostic evaluation.* EPA notes that there is no single definite test for evaluation model performance, but instead there are a series of statistical and graphical MPE elements to examine model performance in as many ways as possible while building a *"weight of evidence"* (WOE) that the model is performing sufficiently well for the air quality problem being studied.

Because this 2011 ozone modeling is using a CAMx 2011 modeling database developed by EPA, we include by reference the air quality modeling performance evaluation as conducted by EPA (EPA, 2016b) on the national 12km domain and will include any additional documentation provided in the future on the use of the 2011en modeling configuration.

In summary, EPA conducted an operational model performance evaluation for ozone to examine the ability of the CAMx v6.32 and v.6.40 modeling systems to simulate 2011 measured concentrations. This evaluation focused on graphical analyses and statistical metrics of model predictions versus observations. Details on the evaluation methodology, the calculation of performance statistics, and results are provided in Appendix A of that report.

Overall, the ozone model performance statistics for the CAMx v6.32 2011 simulation are similar to those from the CAMx v6.20 2011 simulation performed by EPA for the final CSAPR Update. The 2011 CAMx model performance statistics are within or close to the ranges found in other

recent peer-reviewed applications (e.g., Simon et al, 2012). As described in Appendix A of the AQ TSD, the predictions from the 2011 modeling platform correspond closely to observed concentrations in terms of the magnitude, temporal fluctuations, and geographic differences for 8-hour daily maximum ozone. We fully anticipate that the MPE performed for the 2011en platform will demonstrate similar results and will document final evaluation metrics in the documentation associated with the final SIP revision. Thus, the current model performance results demonstrate the scientific credibility of the 2011 modeling platform chosen and used for this analysis. These results provide confidence in the ability of the modeling platform to provide a reasonable projection of expected future year ozone concentrations and contributions.

## 7.0 FUTURE YEAR MODELING

This chapter discusses the future year modeling used in the GNS 8-hour ozone modeling effort.

### 7.1 FUTURE YEAR TO BE SIMULATED

As discussed in Section 1, to support the 2008 ozone NAAQS preliminary interstate transport assessment, EPA conducted air quality modeling to project ozone concentrations at individual monitoring sites to 2023 and to estimate state-by-state contributions to those 2023 concentrations. The projected 2023 ozone concentrations were used to identify ozone monitoring sites that are projected to be nonattainment or have maintenance problems for the 2008 ozone NAAQS in 2023 and for which Kentucky had been identified as a significant contributor.

### 7.2 FUTURE YEAR GROWTH AND CONTROLS

In September 2017, EPA released the revised “en” modeling platform that was the source for the 2023 future year emissions in this analysis. This platform has been identified by EPA as the base case for compliance with the final CSAPR update seasonal EGU NO<sub>x</sub> emission budgets. Additionally, there were several emission categories and model inputs/options that were held constant at 2011 levels as follows:

- Biogenic emissions.
- Wildfires, Prescribed Burns and Agricultural Burning (open land fires).
- Windblown dust emissions.
- Sea Salt.
- 36 km CONUS domain Boundary Conditions (BCs).
- 2011 12 km meteorological conditions.
- All model options and inputs other than emissions.

The effects of climate change on the future year meteorological conditions were not accounted. It has been argued that global warming could increase ozone due to higher temperatures producing more biogenic VOC and faster photochemical reactions (the so called climate penalty). However, the effects of inter-annual variability in meteorological conditions will be more important than climate change given the 12 year difference between the base (2011) and future (2023) years. It has also been noted that the level of ozone being transported into the U.S. from Asia has also increased.

### 7.3 FUTURE YEAR BASELINE AIR QUALITY SIMULATIONS

A 2023 future year base case CAMx simulation was conducted and 2023 ozone design value projection calculations were made based on EPA’s latest ozone modeling guidance (EPA, 2014).

### 7.4 CONCLUSIONS FROM 2023 CAMX MODELING

All sites identified in the final CSAPR update where Kentucky was identified as a significant contributor are predicted to be well below the 2008 ozone standard by 2023. Table 7-1 provides the GNS 2023 future year average and maximum design value modeling results from this analysis for the four problem monitors identified in Section 1.

Based on these calculations, none of the problem monitors are predicted to be in nonattainment or have issues with maintenance in 2023 and therefore Kentucky is not required to estimate its contribution to these monitors.

**Table 7-1. GNS Modeling results at Final CSAPR Update-identified maintenance monitors where Kentucky was identified as a significant contributor.**

Monitor	State	County	2009-2013 Base Period Average Design Value	2009-2013 Base Period Maximum Design Value	2023 Base Case Average Design Value	2023 Base Case Maximum Design Value
390610006	OH	Hamilton	82.0	85	65.0	67.4
421010024	PA	Philadelphia	83.3	87	67.3	70.3
240251001	MD	Harford	90.0	93	71.4	73.8
360850067	NY	Richmond	81.3	83	71.9	73.4

Through this modeling analysis, the Commonwealth of Kentucky has demonstrated compliance with CAA Section 110(a)(2)(D)(i)(I) for the 2008 Ozone National Ambient Air Quality Standard.

## **8.0 MODELING DOCUMENTATION AND DATA ARCHIVE**

EPA recommends that certain types of documentation be provided along with a photochemical modeling attainment demonstration. Alpine Geophysics is committed to supplying the material needed to ensure that the technical support for this SIP revision is understood by all stakeholders, EPA and KYDAQ.

Alpine Geophysics plans to archive all documentation and modeling input/output files generated as part of the 8-hour modeling analysis and will provide a copy to KYDAQ for additional internal use and public distribution. Key participants in this modeling effort will be given data access to the archived modeling information.

## 9.0 REFERENCES

- Abt. 2014. Modeled Attainment Test Software – Users Manual. Abt Associates Inc., Bethesda, MD. April. ([http://www.epa.gov/ttn/scram/guidance/guide/MATS\\_2-6-1\\_manual.pdf](http://www.epa.gov/ttn/scram/guidance/guide/MATS_2-6-1_manual.pdf)).
- Arnold, J.R., R.L. Dennis, and G.S. Tonnesen. 2003. “Diagnostic Evaluation of Numerical Air Quality Models with Specialized Ambient Observations: Testing the Community Multiscale Air Quality Modeling System (CMAQ) at Selected SOS 95 Ground Sites”, *Atmos. Environ.*, Vol. 37, pp. 1185-1198.
- Arnold, J.R.; R.L. Dennis, and G.S. Tonnesen. 1998. Advanced techniques for evaluating Eulerian air quality models: background and methodology. In: Preprints of the 10th Joint Conference on the Applications of Air Pollution Meteorology with the Air & Waste Management Association, January, Phoenix, Arizona. American Meteorological Society, Boston, Massachusetts, paper no. 1.1, pp. 1-5.
- Arunachalam, S. 2009. Peer Review of Source Apportionment Tools in CAMx and CMAQ. University of North Carolina Institute for the Environment, Chapel Hill, NC. August 31. (<http://www.epa.gov/scram001/reports/SourceApportionmentPeerReview.pdf>).
- Boylan, J. W. 2004. “Calculating Statistics: Concentration Related Performance Goals”, paper presented at the EPA PM Model Performance Workshop, Chapel Hill, NC. 11 February.
- Byun, D.W., and J.K.S. Ching. 1999. “Science Algorithms of the EPA Models-3 Community Multiscale Air Quality (CMAQ) Modeling System”, EPA/600/R-99/030.
- Carter, W.P.L. 1999. Documentation of the SAPRC-99 Chemical Mechanism for VOC Reactivity Assessment, Draft report to the California Air Resources Board, Contracts 92-329 and 95-308, 9/13/99.
- Coats, C.J. 1995. Sparse Matrix Operator Kernel Emissions (SMOKE) Modeling System, MCNC Environmental Programs, Research Triangle Park, NC.
- Colella, P., and P.R. Woodward. 1984. The Piecewise Parabolic Method (PPM) for Gas-dynamical Simulations. *J. Comp. Phys.*, **54**, 174201.
- Emery, C., E. Tai, and G. Yarwood. 2001. “Enhanced Meteorological Modeling and Performance Evaluation for Two Texas Episodes”, report to the Texas Natural Resources Conservation Commission, prepared by ENVIRON, International Corp, Novato, CA.
- Emery, C.A., E. Tai, E., R. E. Morris, G. Yarwood. 2009a. Reducing Vertical Transport Over Complex Terrain in CMAQ and CAMx; AWMA Guideline on Air Quality Models Conference, Raleigh, NC, October 26-30, 2009.
- Emery, C.A., E. Tai, R.E. Morris, G. Yarwood. 2009b. Reducing Vertical Transport Over Complex Terrain in Photochemical Grid Models; 8th Annual CMAS Conference, Chapel Hill, NC, October 19-21, 2009.

- Emery, C., E. Tai, G. Yarwood and R. Morris. 2011. Investigation into approaches to reduce excessive vertical transport over complex terrain in a regional photochemical grid model. *Atmos. Env.*, Vol. 45, Issue 39, December 2011, pp. 7341-7351. (<http://www.sciencedirect.com/science/article/pii/S1352231011007965>).
- ENVIRON and UCR. 2004. "Modeling Protocol for the CENRAP 2002 Annual Emissions and Air Quality Modeling." ENVIRON International Corporation and University of California at Riverside. November.
- ENVIRON and Alpine. 2005. CONCEPT Emissions Modeling User's Guide. ENVIRON International Corporation, Novato, CA. Alpine Geophysics, LLC, Arvada, CO. May 27 ([http://www.ladco.org/reports/rpo/emissions/new\\_emissions\\_model\\_concept\\_introduction\\_alpine\\_environ.pdf](http://www.ladco.org/reports/rpo/emissions/new_emissions_model_concept_introduction_alpine_environ.pdf))
- ENVIRON. 2015. User's Guide Comprehensive Air-quality Model with extensions Version 6.3. ENVIRON International Corporation, Novato, CA. March. ([http://www.camx.com/files/camxusersguide\\_v6-3.pdf](http://www.camx.com/files/camxusersguide_v6-3.pdf)).
- EPA. 1991. "Guidance for Regulatory Application of the Urban Airshed Model (UAM)," Office of Air Quality Planning and Standards, U.S. Environmental Protection Agency, Research Triangle Park, N.C.
- EPA. 1999. "Draft Guidance on the Use of Models and Other Analyses in Attainment Demonstrations for the 8-hr Ozone NAAQS". Draft (May 1999), U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards, Research Triangle Park, N.C.
- EPA. 2001. "Guidance Demonstrating Attainment Air Quality Goals for PM2.5 and Regional Haze". Draft Final (17 February 2005), U.S. Environmental Protection Agency, Atmospheric Sciences Modeling Division, Research Triangle Park, N.C.
- EPA. 2003a. A Conceptual Model to Adjust Fugitive Dust Emissions to Account for Near Source Particle Removal in Grid Model Applications, prepared by Tom Pace, U.S. EPA, August. [http://www.epa.gov/ttn/chief/emch/invent/statusfugdustemissions\\_082203.pdf](http://www.epa.gov/ttn/chief/emch/invent/statusfugdustemissions_082203.pdf).
- EPA. 2003b. National Emission Inventory QA and Augmentation Memo, prepared by Anne Pope, U.S. EPA, June. [http://www.epa.gov/ttn/chief/emch/invent/qaaugmentationmemo\\_99nei\\_60603.pdf](http://www.epa.gov/ttn/chief/emch/invent/qaaugmentationmemo_99nei_60603.pdf)
- EPA. 2005a. Guidance on the Use of Models and Other Analyses in Attainment Demonstrations for the 8-hr Ozone NAAQS -- Final. U.S. Environmental Protection Agency, Atmospheric Sciences Modeling Division, Research Triangle Park, N.C. October.
- EPA. 2005b. Technical Support Document for the Final Clean Air Interstate Rule – Air Quality Modeling. U.S. Environmental Protection Agency, Office of Air Quality and Planning Standards, Research Triangle Park, North Carolina, 27711. March.

- EPA. 2005c. "Regional Haze Regulations and Guidelines for Best Available Technology (BART) Determinations". Fed. Reg./Vol. 70, No. 128/Wed. July, Rules and Regulations, pp. 39104-39172. 40 CFR Part 51, FRL-7925-9, RIN AJ31.
- EPA. 2007. Guidance on the Use of Models and Other Analyses for Demonstrating Attainment of Air Quality Goals for Ozone, PM<sub>2.5</sub> and Regional Haze. U.S. Environmental Protection Agency, Research Triangle Park, NC. EPA-454/B-07-002. April.  
(<http://www.epa.gov/ttn/scram/guidance/guide/final-03-pm-rh-guidance.pdf>).
- EPA. 2010. Technical Support Document for the Transport Rule. Docket ID No. EPA-HQ-OAR-2009-0491. Air Quality Modeling. U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards, Air Quality Assessment Division, Research Triangle Park, NC. June.
- EPA. 2014a. Motor Vehicle Emissions Simulator (MOVES) – User Guide for MOVES2014. Assessment and Standards Division, Office of Transportation and Air Quality, U.S. Environmental Protection Agency. (EPA-420-B-14-055). July.  
(<http://www.epa.gov/oms/models/moves/documents/420b14055.pdf>).
- EPA. 2014b. Motor Vehicle Emissions Simulator (MOVES) –MOVES2014 User Interface Manual. Assessment and Standards Division, Office of Transportation and Air Quality, U.S. Environmental Protection Agency. (EPA-420-B-14-067). July.  
(<http://www.epa.gov/oms/models/moves/documents/420b14057.pdf>).
- EPA. 2014c. Motor Vehicle Emissions Simulator (MOVES) –MOVES2014 Software Design Reference Manual. Assessment and Standards Division, Office of Transportation and Air Quality, U.S. Environmental Protection Agency. (EPA-420-B-14-058). December.  
(<http://www.epa.gov/oms/models/moves/documents/420b14056.pdf>).
- EPA. 2014d. Meteorological Model Performance for Annual 2011 WRF v3.4 Simulation, U.S. Environmental Protection Agency. November 2014.
- EPA. 2014e. Draft Modeling Guidance for Demonstrating Attainment of Air Quality Goals for Ozone, PM<sub>2.5</sub>, and Regional Haze, U.S. Environmental Protection Agency. December 2014.
- EPA. 2015b. Air Quality Modeling Technical Support Document for the 2008 Ozone NAAQS Transport Assessment. U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards. January.  
(<http://www.epa.gov/airtransport/O3TransportAQModelingTSD.pdf>).
- EPA. 2016a. Technical Support Document (TSD) Preparation of Emissions Inventories for the Version 6.3, 2011 Emissions Modeling Platform. U.S. Environmental Protection Agency. August 2016.
- EPA. 2016b. Air Quality Modeling Technical Support Document for the 2015 Ozone NAAQS Preliminary Interstate Transport Assessment. U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards. December 2016.

- EPA. 2017a. Technical Support Document (TSD) Additional Updates to Emissions Inventories for the Version 6.3, 2011 Emissions Modeling Platform for the Year 2023. U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards. October 2017. [https://www.epa.gov/sites/production/files/2017-11/documents/2011v6.3\\_2023en\\_update\\_emismod\\_tsd\\_oct2017.pdf](https://www.epa.gov/sites/production/files/2017-11/documents/2011v6.3_2023en_update_emismod_tsd_oct2017.pdf)
- EPA. 2017b. Use of Photochemical Grid Models for Single-Source Ozone and secondary PM2.5 impacts for Permit Program Related Assessments and for NAAQS Attainment Demonstrations for Ozone, PM2.5 and Regional Haze. Memorandum from Tyler Fox, U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards. August 2017. [https://www3.epa.gov/ttn/scram/guidance/clarification/20170804-Photochemical\\_Grid\\_Model\\_Clarification\\_Memo.pdf](https://www3.epa.gov/ttn/scram/guidance/clarification/20170804-Photochemical_Grid_Model_Clarification_Memo.pdf)
- Gery, M. W., G.Z. Whitten, J.P. Killus, and M.C. Dodge. 1989. A photochemical mechanism for urban and regional-scale computer modeling. *J. Geophys. Res.* 94, 12925-12956.
- Gilliam, R. 2010. Evaluation of Multi-Annual CONUS 12 km WRF Simulations. U.S. Environmental Protection Agency, NREL, Atmospheric Modeling and Analysis Division. (<http://epa.gov/scram001/adhoc/gilliam2010.pdf>).
- Kemball-Cook, S., Y. Jia, C. Emery, R. Morris, Z. Wang and G. Tonnesen. 2004. Comparison of CENRAP, VISTAS and WRAP 36 km MM5 Model Runs for 2002, Task 3: Meteorological Gatekeeper Report. [http://pah.cert.ucr.edu/agm/cenrap/ppt\\_files/CENRAP\\_VISTAS\\_WRAP\\_2002\\_36km\\_MM5\\_eval.ppt](http://pah.cert.ucr.edu/agm/cenrap/ppt_files/CENRAP_VISTAS_WRAP_2002_36km_MM5_eval.ppt). December.
- Michalakes, J., J. Dudhia, D. Gill, J. Klemp and W. Skamarock. 1998. Design of a Next-Generation Regional Weather Research and Forecast Model. Mesoscale and Microscale Meteorological Division, National Center for Atmospheric Research, Boulder, CO. (<http://www.mcs.anl.gov/~michalak/ecmwf98/final.html>).
- Michalakes, J., S. Chen, J. Dudhia, L. Hart, J. Klemp, J. Middlecoff and W. Skamarock. 2001. Development of a Next-Generation Regional Weather Research and Forecast Model. Developments in Teracomputing: Proceedings of the 9th ECMWF Workshop on the Use of High Performance Computing in Meteorology. Eds. Walter Zwiefelhofer and Norbet Kreitz. World Scientific, Singapore. Pp. 269-276. (<http://www.mmm.ucar.edu/mm5/mpp/ecmwf01.htm>).
- Michalakes, J., J. Dudhia, D. Gill, T. Henderson, J. Klemp, W. Skamarock and W. Wang. 2004. The Weather Research and Forecast Model: Software Architecture and Performance. Proceedings of the 11th ECMWF Workshop on the Use of High Performance Computing in Meteorology. October 25-29, 2005, Reading UK. Ed. George Mozdzynski. ([http://wrf-model.org/wrfadmin/docs/ecmwf\\_2004.pdf](http://wrf-model.org/wrfadmin/docs/ecmwf_2004.pdf)).
- Moore, C.T. et al. 2011. "Deterministic and Empirical Assessment of Smoke's Contribution to Ozone – Final Report. Western Governors' Association, Denver, CO. ([https://wraptools.org/pdf/11-1-6-6\\_final\\_report\\_DEASCO3\\_project.pdf](https://wraptools.org/pdf/11-1-6-6_final_report_DEASCO3_project.pdf))

- Morris, R. E. and T. C. Myers. 1990. "User's Guide for the Urban Airshed Model. Volume I: User's Manual for UAM (CB-IV)" prepared for the U.S. Environmental Protection Agency (EPA-450/4-90-007a), Systems Applications International, San Rafael, CA.
- Page. S. (October 27, 2017). *Supplemental Information on the Interstate Transport State Implementation Plan Submissions for the 2008 Ozone national Ambient Air Quality Standards under Clean Air Act Section 110(a)(2)(D)(i)(I)* [Memorandum]. Research Triangle Park, NC: U.S. EPA, Office of Air Quality Planning and Standards. Retrieved from [https://www.epa.gov/sites/production/files/2017-10/documents/final\\_2008\\_o3\\_naags\\_transport\\_memo\\_10-27-17b.pdf](https://www.epa.gov/sites/production/files/2017-10/documents/final_2008_o3_naags_transport_memo_10-27-17b.pdf)
- Simon, H., K. Baker and S. Phillips. 2012. Compilations and Interpretation of Photochemical Model Performance Statistics Published between 2006 and 2012. *Atmos. Env.* 61 (2012) 124-139. December. (<http://www.sciencedirect.com/science/article/pii/S135223101200684X>).
- Skamarock, W. C. 2004. Evaluating Mesoscale NWP Models Using Kinetic Energy Spectra. *Mon. Wea. Rev.*, Volume 132, pp. 3019-3032. December. ([http://www.mmm.ucar.edu/individual/skamarock/spectra\\_mwr\\_2004.pdf](http://www.mmm.ucar.edu/individual/skamarock/spectra_mwr_2004.pdf)).
- Skamarock, W. C., J. B. Klemp, J. Dudhia, D. O. Gill, D. M. Barker, W. Wang and J. G. Powers. 2005. A Description of the Advanced Research WRF Version 2. National Center for Atmospheric Research (NCAR), Boulder, CO. June. ([http://www.mmm.ucar.edu/wrf/users/docs/arw\\_v2.pdf](http://www.mmm.ucar.edu/wrf/users/docs/arw_v2.pdf))
- Skamarock, W. C. 2006. Positive-Definite and Monotonic Limiters for Unrestricted-Time-Step Transport Schemes. *Mon. Wea. Rev.*, Volume 134, pp. 2241-2242. June. ([http://www.mmm.ucar.edu/individual/skamarock/advect3d\\_mwr.pdf](http://www.mmm.ucar.edu/individual/skamarock/advect3d_mwr.pdf)).
- Sullivan D.C., Raffuse S.M., Pryden D.A., Craig K.J., Reid S.B., Wheeler N.J.M., Chinkin L.R., Larkin N.K., Solomon R., and Strand T. (2008) Development and applications of systems for modeling emissions and smoke from fires: the BlueSky smoke modeling framework and SMARTFIRE: 17<sup>th</sup> International Emissions Inventory Conference, Portland, OR, June 2-5. Available at: <http://www.epa.gov/ttn/chief/conferences.html>.
- UNC. 2008. Atmospheric Model Evaluation Tool (AMET) User's Guide. Institute for the Environment, University of North Carolina at Chapel Hill. May 30. ([https://www.cmascenter.org/amet/documentation/1.1/AMET\\_Users\\_Guide\\_V1.1.pdf](https://www.cmascenter.org/amet/documentation/1.1/AMET_Users_Guide_V1.1.pdf)).
- UNC and ENVIRON, 2014a. Three-State Air Quality Modeling Study (3SAQS) – Draft Modeling Protocol 2011 Emissions & Air Quality Modeling. University of North Carolina at Chapel Hill and ENVIRON International Corporation, Novato, CA. July. ([http://vibe.cira.colostate.edu/wiki/Attachments/Modeling/3SAQS\\_2011\\_Modeling\\_Protocol\\_Finalv2.pdf](http://vibe.cira.colostate.edu/wiki/Attachments/Modeling/3SAQS_2011_Modeling_Protocol_Finalv2.pdf)).

- UNC. 2015. SMOKE v3.6.5 User's Manual. University of North Carolina at Chapel Hill, Institute for the Environment.  
(<https://www.cmascenter.org/smoke/documentation/3.6.5/html/>).
- UNC and ENVIRON, 2015a. Three-State Air Quality Modeling Study (3SAQS) – Weather Research Forecast 2011 Meteorological Model Application/Evaluation. University of North Carolina at Chapel Hill and ENVIRON International Corporation, Novato, CA. March 5.  
([http://vibe.cira.colostate.edu/wiki/Attachments/Modeling/3SAQS\\_2011\\_WRF\\_MPE\\_v05Mar2015.pdf](http://vibe.cira.colostate.edu/wiki/Attachments/Modeling/3SAQS_2011_WRF_MPE_v05Mar2015.pdf)).
- Wesely, M.L. 1989. Parameterization of Surface Resistances to Gaseous Dry Deposition in Regional-Scale Numerical Models. *Atmos. Environ.*, 23, 1293-1304.
- Xiu, A. and J.E. Pleim. 2000. Development of a land surface model. Part I: application in a mesoscale meteorology model. *J. App. Met.*, 40, pp. 192-209.
- Yantosca, B. 2004. GEOS-CHEMv7-01-02 User's Guide, Atmospheric Chemistry Modeling Group, Harvard University, Cambridge, MA.
- Yarwood, G., J. Jung, G. Z. Whitten, G. Heo, J. Mellberg and M. Estes. 2010. Updates to the Carbon Bond Mechanism for Version 6 (CB6). 2010 CMAS Conference, Chapel Hill, NC. October.  
([http://www.cmascenter.org/conference/2010/abstracts/emery\\_updates\\_carbon\\_2010.pdf](http://www.cmascenter.org/conference/2010/abstracts/emery_updates_carbon_2010.pdf))
- Zhang, L., S. Gong, J. Padro, L. Barrie. 2001. A size-segregated particle dry deposition scheme for an atmospheric aerosol module. *Atmos. Environ.*, 35, 549-560.
- Zhang, L., J. R. Brook, and R. Vet. 2003. A revised parameterization for gaseous dry deposition in air-quality models. *Atmos. Chem. Phys.*, 3, 2067–2082.